

# **MobiBox**

**The compact unified Event  
Communication Plattform**

# **NEW VOICE**



**The MobiBBox is  
the »Plug and Play«  
alerting solution  
by New Voice.**



## Ready to use

MobiCall is pre-installed  
and ready to use



## Low maintenance

Support and configuration at  
any time via remote  
maintenance



## Server Operating System

Windows 2022 Server  
operating System



## No moving parts



## Internal SMS module

SMS module - requires  
SIM card only



## Connections

8 integrated contacts &  
2 integrated relays



## Integrated Web Server

For an intuitive  
configuration



## Modules & Interfaces

MobiCall modules and  
interfaces can be unlocked



## Double Power

High performance due to  
increased RAM and hard disk



## Compact Industrial PC



## Easy Handling



## FRONT



## BACK





## Standard features of the MobiCall platform



### PC Client

PC client for triggering and alarm pop-ups



### Information Distribution

Time & calendar dependent information distribution



### Lists & Plans

Integration of on-call lists & rosters



### Skill-Based Transfer

For optimal alarm distribution



### Reporting & Statistics

Provision of reports & statistics



### WaaS

Connection to the Watchdog as a Service Cloud



# Typical Applications



**Fire Alarms**



**ITK  
Monitoring**



**Evacuation**



**Silent Alarm  
&  
Emergency Calls**



**Personal Protection  
&  
Positioning**



**Connecting to  
Nurse  
Call Systems**



**Monitoring  
Technical  
Components**




**IoT-based  
Monitoring**



Maximum expansions/ capacities	Quantity
SIP voice channels	30
Interface	5
Contacts/ Relay outputs	128
Alarm groups	1.000
Message-Link participants	250
Telephone alarm inputs	100
Multimedia Clients (PC & Smartphone)	250
Alarm scenarios	1.000
Processor	Intel® Core i3-6157U 2 x 2,4 GHz 64 Bit
RAM	32768 MB SO-DDR4
Disk	256 GB mSATA III SSD
Operating	Windows Server 2022 Standard
Dimension	216 mm Width x 63,5 mm Height x 126 mm Depth
Weight	Approx. 1,2 kg
Consumption	Standby: approx. 1 watts Idle: approx. 12 watts Full load: approx. 30 watts
Power connector	External power supply 220V // 12V // 5A
Ventilation	No, passive cooling
VESA / Wall Mounting	no / yes
Temperature	-30°C - +40°C
Front panel connections	6 x COM RS232 1 x GPIO (8 DIN, 2 DOUT)  4 x USB 3.0 / 3.1 2 x USB 2.0 2 x Audio 1x Line-In, 1x Line-Out
Rear panel connections	2 x Intel Gigabit LAN 1 x VGA 1 x HDMI 1.4 (Adapter HDMI -> Displayport is included) 2 x Antennas Ports SMS
Possible licenses	NVWAGOS008CSOFT (8 Contacts) NVWAGOR002SOFTE (2 Releases) NVSMS4GSOFT (SMS Module)



**Fast, reliable, indispensable.**

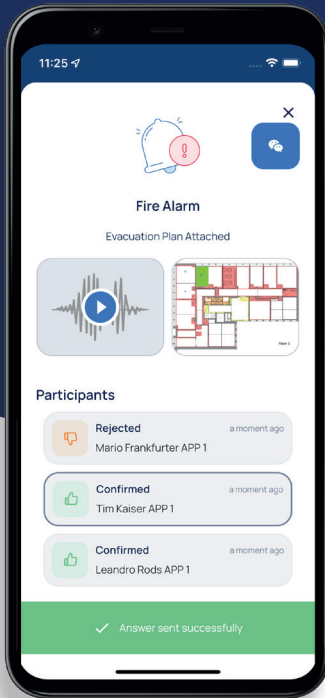

**Prepared for  
every alarm -  
the MobiBBBox  
by New Voice.**

**Swift reactions in critical  
moments are crucial.  
Learn more on our website!**

**SCAN ME**





Germany:

New Voice Systems GmbH  
Mörikestrasse 17  
71636 Ludwigsburg  
Tel: +49 2131 266 85 50



[www.newvoice.global](http://www.newvoice.global)



[mobicall@newvoice.global](mailto:mobicall@newvoice.global)

Austria:

New Voice (Austria) GmbH  
Paschinger Strasse 59  
4060 Leonding  
Tel: +43 732 890 120

Switzerland:

New Voice (Schweiz) AG  
Militärstrasse 90  
8004 Zürich  
Tel: +41 58 750 11 11

**NEW VOICE**